



METAL TRADE COMAX, a.s.

CUTTING CENTRES

We cut steel and aluminium
Precisely, quickly, to measure



METAL TRADE COMAX, a.s.
273 24, Velvary 420, Czech Republic
info@mtcomax.cz · www.mtcomax.cz



ISO 9001
ISO 14001
ISO 45001
ISO 50001
IATF 16949



Our portfolio:

- Steel and aluminum processing
- Natural or pre-painted material option
- Cutting to sheets, slitting to strips, precision cutting
- Thickness 0.3 - 8.0 mm
- Width of up to 1 830 mm



Processed material:

- HDG steel
- Cold-rolled steel
- Hot-rolled steel pickled/unpickled
- Electrogalvanized steel
- Steel with ZnAlMg coating (Magnelis)
- Pre-painted steel
- Aluminium coated steel
- Aluminium



Complexity of service:

- Cutting with tensile straightening
- Tests of mechanical properties
- Spectral analysis
- Storage
- Just-in-time delivery



Certification:

- | | |
|--------------|------------------------------|
| ■ ISO 9001 | Quality management |
| ■ ISO 14001 | Environmental management |
| ■ ISO 45001 | Health protection management |
| ■ ISO 50001 | Energy management |
| ■ IATF 16949 | Automotive standard |



Technology maturity:

- 4 high-capacity cutting-to-length lines
- 1 cutting line with tensile straitening
- 5 slitting lines
- 1 material testing machine
- 4 cranes with a load capacity up to 34 tons



(material testing machine)



COILS



NATURAL

Material	HDG / CR / HR steel
Grade	DX51-DX57, S220GD-S420GD etc.
Thickness	0,4 - 5,0 mm
Coil width	150 - 1 700 mm
Inside ø	508/610/760/850 mm
Outside ø	max 2 100 mm
Width tolerance	+/- 0,1 mm
Strength limit	1 200 MPa
Weight	max 34 000 kg

Material	Al alloys
Grade	EN AW 1050, 3*serie, 5*serie
Thickness	0,3 - 6,0 mm
Coil width	150 - 1 600 mm
Inside ø	400/508/610 mm
Outside ø	max 2 000 mm


PRE-PAINTED

Material	HDG / CR steel
Grade	DX51-DX53, S220-S350, DC01
Thickness	0,3 - 1,5 mm
Coil width	150 - 1 600 mm
Inside ø	400/508/610 mm
Outside ø	max 2 000 mm

Material	Al alloys
Grade	EN AW 1050, 3*serie, 5*serie
Thickness	0,3 - 4,0 mm
Coil width	150 - 1 600 mm
Inside ø	400/508/610 mm
Outside ø	max 2 000 mm



STRIPS

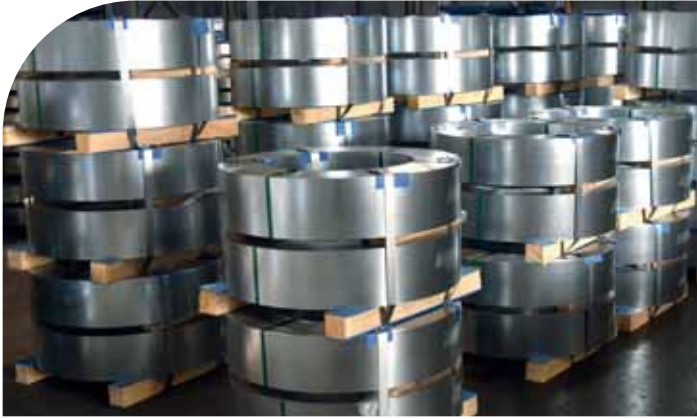

NATURAL


Material	HDG / CR / HR steel
Grade	DX51-DX57, S220GD-S420GD etc.
Thickness	0,4 - 5,0 mm
Coil width	350 - 1 700 mm
Coil weight	max 34 000 t
Strip width	min 21 mm
Inside ø	508/610/760/850 mm
Outside ø	max 2 100 mm
Width tolerance	+/- 0,1 mm
Strength limit	1 200 MPa

Material	Al alloys
Grade	EN AW 1050, 3*serie, 5*serie
Thickness	0,3 - 4,0 mm
Coil width	60 - 1 600 mm
Strip width	min 18 mm
Inside ø	400/508/610 mm
Outside ø	max 2 000 mm


PRE-PAINTED

Material	HDG / CR steel
Grade	DX51-DX53, S220-S350, DC01
Thickness	0,3 - 1,5 mm
Strip width	min 18 mm
Inside ø	400/508/610 mm
Outside ø	max 2 000 mm

Material	Al alloys
Grade	EN AW 1050, 3*serie, 5*serie
Thickness	0,3 - 4,0 mm
Strip width	min 18 mm
Inside ø	400/508/610 mm
Outside ø	max 2 000 mm

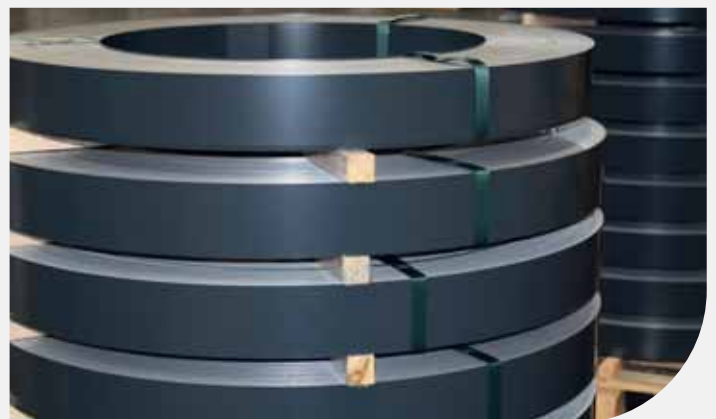

SHEETS

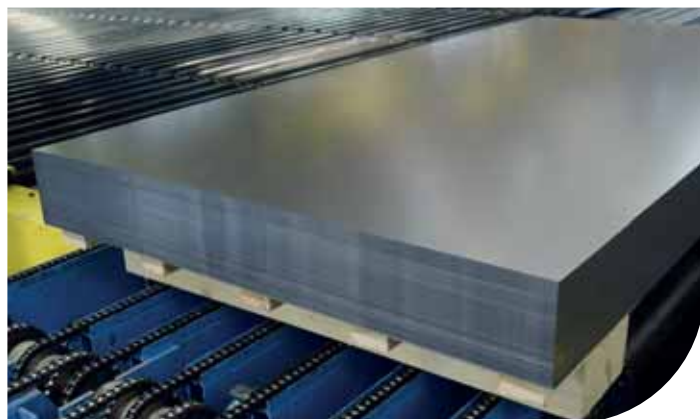

NATURAL

Material	HDG / CR / HR steel
Grade	DX51-DX57, S220GD-S420GD etc.
Thickness	0,4 - 8,0 mm
Width	250 - 1 830 mm
Length	300 - 12 000 mm
Weight	max 9 000 kg

Material	Al alloys
Grade	EN AW 1050, 3*serie, 5*serie
Thickness	0,3 - 4,0 mm
Width	300 - 1 550 mm
Length	300 - 6 000 mm
Weight	max 1 500 kg

Steel cutting with tensile straitening	
Coil thickness	2,0 - 8,0 mm
Coil width	max 1 830 mm
Coil tensile strength	690 MPa
Sheet lenght	2 - 12 m

Aluminium anti-slip sheets	
Thicknes	1,5 - 6,0 mm
Width	1 000 - 3 000 mm
Length	1 000 - 3 000 mm

PRE-PAINTED

Material	HDG / CR steel
Grade	DX51-DX53, S220-S350, DC01
Thickness	0,3 - 1,5 mm
Width	250 - 1 550 mm
Length	300 - 6 000 mm
Weight	max 3 000 kg

Material	Al alloys
Grade	EN AW 1050, 3*serie, 5*serie
Thickness	0,3 - 4,0 mm
Width	250 - 1 550 mm
Length	300 - 6 000 mm
Weight	max 1 500 kg





Over **30 years** on the market
Production and storage area **30,500 m²**
Production capacity reaches **520,000 tons** per year



METAL TRADE COMAX, a.s.

273 24, Velvary 420, Czech Republic, VAT: CZ49684442, DE326552286, SK4020121039
e-mail: steelservice@mtcomax.cz | www.mtcomax.cz



www.mtcomax.cz

